



NOTAS (NOTES):


- 1- DIFERENCIA DE CONEXION APROXIMADA (CONNECTION DIFFERENCE APPROXIMATELY)  $3^{\circ}\text{C} \pm 1.5^{\circ}\text{C}$
- 2- MAXIMA TEMPERATURA DEL CUERPO (MAXIMUM BODY TEMPERATURE)  $85^{\circ}\text{C}$
- 3- CAPACIDAD DE MANIOBRA (POWER SUPPLY) P1:16A/400V~ P2:6A/400V~
- 4- LIMITES DE TEMPERATURA EN EL BULBO (TEMPERATURE LIMITS ON THE PHIAL)  $-10 \pm 115^{\circ}\text{C}$
- 5- LAS TEMPERATURAS INDICADAS SON VALORES DE DESCONEXION P-1 (THE INDICATED TEMPERATURES ARE DISCONNECTION VALUES P-1)
- 6- EJE DIBUJADO EN POSICION "0" (SPINDLE DRAW IN "0" POSITION)
- 7- FASTON 6,3 x 0,8 DIN 46244
- 8- LAS TEMPERATURAS SON MEDIDAS INTRODUCIENDO EL BULBO Y 80/100mm DE CAPILAR EN EL BAÑO A TEMPERATURA AMBIENTE DE  $23 \pm 3^{\circ}\text{C}$  (TEMPERATURES ARE MEASURED INTRODUCING THE PHIAL AND 80/100mm CAPILLARY IN THE BATH AT AMBIENT TEMPERATURE OF  $23 \pm 3^{\circ}\text{C}$ )

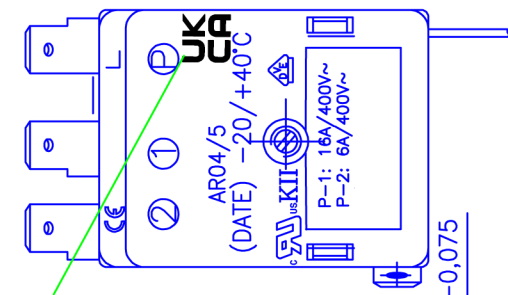


UKCA LABEL



\*\*SECCION DEL EJE (SPINDLE SECTION)

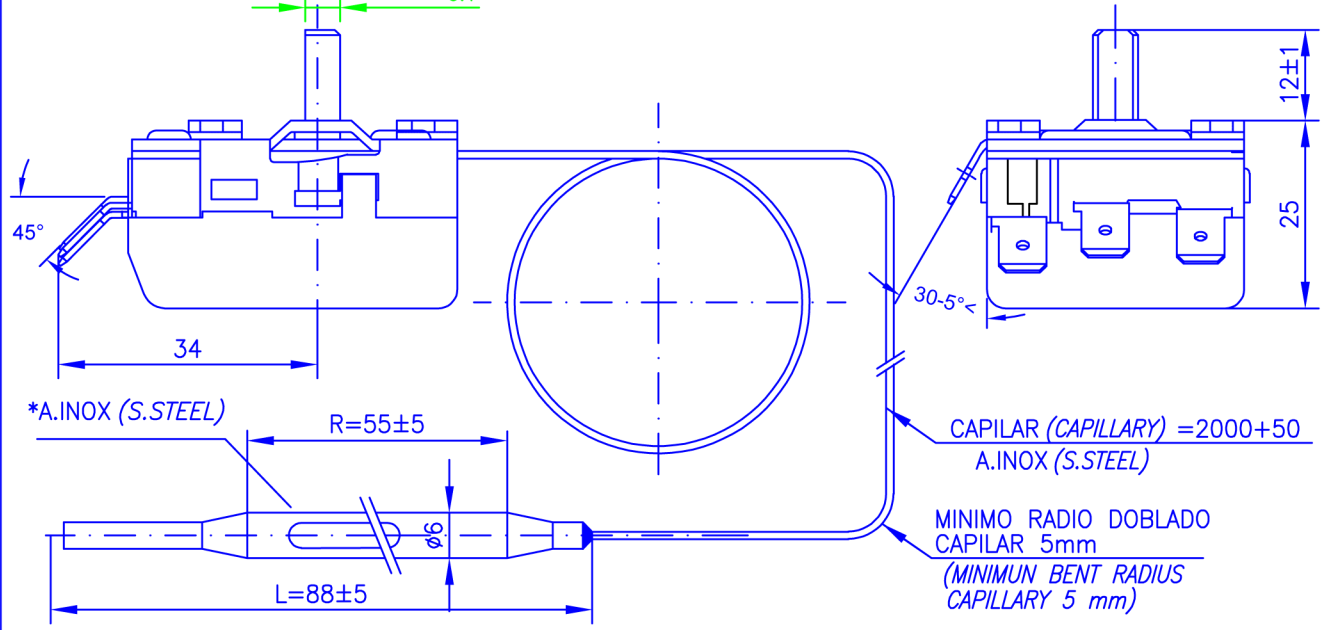

MAX. LONG. DEL TORNILLO 4 mm  
 MAS ESP. CHAPA  
 MAX. SCREW LENGTH 4mm PLUS  
 PLATE THICKNESS

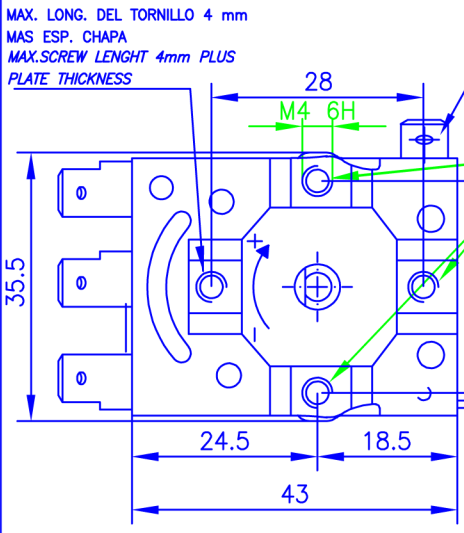

T.TOMA TIERRA (EARTH TERMINAL)

EN ESTOS AGUJEROS LA MAX. LONG. DEL TORNILLO SERA DE 6 mm MAS EL ESPESOR DE LA CHAPA  
 (IN THESE HOLES, THE MAX. SCREW LENGTH WILL BE 6mm PLUS PLATE THICKNESS)

CIRCUITO ELECTRICO POSICION DE DESCONEXION (ELECTRIC DIAGRAM) (OPEN POSITION)





DIAGRAMA DE TEMPERATURAS (TEMPERATURE DIAGRAM)

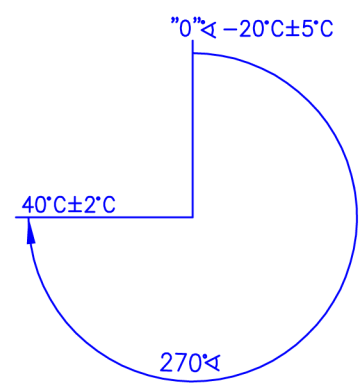

\* 0,009 \*\* N-40.864/2 (0.75)

	Toler. general UNE/EN 22768 "m"	DIBUJADO	REVISADO	FECHA
	General tolerance UNE/EN 22768 "m"	DRAWN	APPROVED	DATE
EDICIONES	EDICION EDITION	Ç.K.	V.B.C.	07/03/23

AR04/5

REF. CLIENTE: AR04/5  
 SUSTITUYE A:

ESCALAS 1:1  
 TERMOSTATO (THERMOSTAT)